





Tractor front loader





Fork lift





Excavator





Dumper





Concrete mixer





On board dynamic weighing system

THE PRODUCT

Pegasus2 scale provides the information needed to load maximum weights faster and keep trucks moving without going to a weighbridge scale.

This means you get increased productivity on every load, every day.

The Pegasus 2 kit is designed to do the job and survive the rugged environments found in quarry and other loading operations.

Pegasus 2 can be installed on most wheel loaders, tractor front loaders, excavators, telescopic handlers, fork lifts (more than 30 brands, complete list under request) giving to the operators the opportunity to increase capability and efficiency while eliminating material loss due to overloading.







Images are indicative.

FEATURES AND ADVANTAGES

One product for many applications:

- Dynamic weighing: allows weighing without interfering with the operators work.
- Save time loading, this means more loads per day.
- Intuitive and easy keyboard.
- Automatic load accumulation (up to 256 weighing for a total of 299 tons).
- Live weight reading.
- Standard printer port to connect plug&play the printer.
- Edit of components name, customers, operators name.
- Overload warning.
- Easy and immediate calibration set (calibration has to be performed with a known weight nearest to the full capacity of the machine).
- LCD graphic display with backlight for easy reading and local language capability.
- Multiple information shown on the display, thanks to the userdriven interface.
- Double pressure transducers for high accuracy.





On board dynamic weighing system

THE SYSTEM

The Pegasus2 system uses pressure sensors to measure changes in hydraulic pressure that are directly proportional to the load being lifted. The output of the pressure sensor is interpreted and shown on the display. The LCD display shows the individual lift weights and cumulative total by material or truck.

The system is composed of

- Pegasus2 indicator
- 2 pressure sensors
- 2 proximity sensors
- 1 sensor connection box
- 1 sensor cable (4m)
- 1 power supply cable (3,8 m)
- 1 mechanic support for proximity



TECHNICAL DATA

INDICATOR

Range (f.s.) 0 - 99999

Resolution

1 - 2 - 5 - 10 - 20 - 50 kg

Accuracy dynamic mode

Operating temperature -30/+60 °C

Power supply 9,5 - 32 Vd.c

Dimensions (mm) 234 x 200 x 100

Weight (gr) 2500

Case:

PA66+GF 25% VO

Protection grade IP 67

Display

Graphic display 280 x 64 AA 27.49 x 120.37 mm backlight

PRESSURE TRANSDUCERS

Capacity 500 bar

Connection 1/4 Gas



ACCESSORIES

THERMAL PRINTER

With installation of the optional printer, the operator can get all the weight data printed in the cab, saving time and money.

- Very strong case for using in hard conditions.
- Customizable header with company data or other information.



On board dynamic weighing system


SOFTWARE

Load supervisor software for a perfect control of the working data.

- Customers management.
- Components management.
- Single load history.
- Total load history.
- Amount for customer or component.
- Detailed report on Excel or PDF.




SOFTWARE

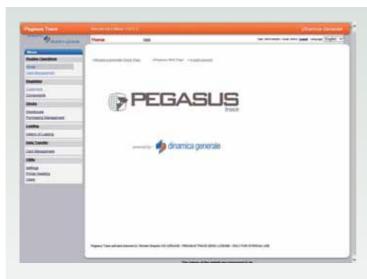

Load supervisior software for a perfect control of your working data.

- Friendly user interface
- Collect data and information about your customers
- Informaton about all the components loaded
- All working phases managed in the most efficient way from warehouse and purchasing to customers



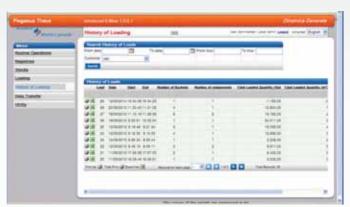

Pegasus2 applications

On board dynamic weighing system



WHEEL FRONT LOADER

- Time saving
- Control of overloads
- Safety incresing

Code: 999-0448





TRACTOR FRONT LOADER

- Improve equipment effectiveness
- Overloads warning




Code: 999-0448



FORK LIFT

Accorate weight simply by lifting pallets:

- Safety warehouse operations
- Reduce movements of transporting pallets to and from a platform scale

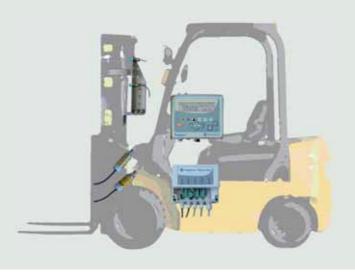

On board dynamic weighing system



TELESCOPIC HANDLER

- To save time and reduce costs
- Immediate control of the overloads
- Safety increased

Code: 999-0448





EXCAVATOR

- Track and benchmark excavator and operators efficiency
- It provides bucket by bucket payload information to optimize loading's operations

Code: 999-0448 + 979-0217





THE PRODUCT

On board robust and reliable weighing system for articulated and rigid dumpers.

Flexible and fully automatic, very useful to prevent overloads.

WHY SHOULD YOU INSTALL AN ON **BOARD WEIGHING SYSTEM?**

The on board weighing allows to optimize all working phases with instant control of the data and to reduce vehicles maintenance costs using them at the best of their efficiency. Better planning and control of the work process.

- It provides protection from excessive loads on tires.
- Better assignement planning and more efficient use of dumpers.



LOAD CELLS

Load cells are demonstrative as an example. Load capacity and mechanical construction of the equipment will define the choice of the appropriate model. Other versions available on request.



10.000kg code 969-0236



7.000kg code 969-0297



5.700kg code 969-0061



30.000kg code 969-0295 High capacity available



7.500kg code 969-0306









GPRS communcation through modem.

Intuitive software to control data.

Code: 999-0866

SOFTWARE

- Geographic coordinates through GPS.
- Fleet tracking and better working plan.
- Distance covered, average speed.
- Operators management.

- Material loaded.
- Working hours counter.
- Overloads counter.
- Customer traceability.





Dumper





THE PRODUCT

Mixmade is an on-board robust and reliable weighing system for concrete mixers. The weight reading is by shear beam or double shear beam load cells which directly support the drum and transmit the signal to the indicator that shows it in the cab.

System Code: 999-052/ Accessories Code: Thermal print 999-0010 Concrete Trace Code: 999-0867

WHY SHOULD YOU INSTALL AN ON BOARD WEIGHING SYSTEM?

The system is designed to operate in tough environments, thanks to its high robustness and protection grade. The use of load cell provides high accuracy and precise weighing to guarantee a saving on the material cost and to get an optimum mixture.



LOAD CELLS

Load cells are demonstrative as an example. Load capacity and mechanical construction of the equipment will define the choice of the appropriate model. Other versions available on request.



2.500kg code 969-0011



5.700kg code 969-0061



2.500kg code 969-0012



7.500kg code 969-0306





THE SYSTEM

Mixmade system allows the weight reading through share beam or double share beam load cells. The load cells signals is transmitted to the indicator that turns it into weight. The use of load cells provide very high accuracy. The system is composed of:

- Mixmade weighing indicator
- Load cells
- Junction box

Code: 999-0448













TECHNICAL DATA

Small indicator dimension suitable for in cab application.

SYSTEM

Number of formulas

Number of components 24 selectable from 100

ID customer management

Accumulation management Yes

Range

0 - 99999 kg/pounds

Operating temperature

-30/+65 °C

Power supply 9.5 - 32 Vdc

9.5 - 52 Vac

RED display

5 digit x 40 mm height

LCD display

- 16 alphanumeric characters
- 15 mm with back light

Protection grade

IP 67

AVAILABLE LANGUAGES

English Croatian Swedish German Danish Latvian Turkish Russian Greek Spanish Slovenian Portuguese Finnish Polish Estonian Czech Italian Slovak French Norwegian Dutch Lithuanian Hungarian Chinese



ACCESSORIES

THERMAL PRINTER

With installation of the optional printer, the operator can get all the weight data printed in the cab, saving time and money.

- Very strong case for using in hard conditions.
- Customizable header with company data or other information.












SOFTWARE

The software allows you the complete control of your working data.

- Customers management
- Components management
- Amount for customer or component
- Detailed report on Excel or PDF

- Material and labour costs
- Customer traceability
- Multilanguages

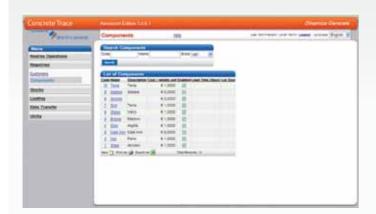



QUALITY & CERTIFICATIONS*







CONTACTS

GENERAL INFORMATION info@dinamicagenerale.com
SALES DEPARTMENT sales@dinamicagenerale.com
CUSTOMER SERVICE support@dinamicagenerale.com

OUR GLOBAL NETWORK

ITALY

Dinamica Generale S.p.A. Via Mondadori, 15 46025 Poggio Rusco (Mantova) Phone: +39 0386.52134 Fax: +39 0386.51523 NORTH AMERICA

Dinamica Generale US, Inc 100 Illinois St.Suite 200 St. Charles, IL 60174 Phone: +715 781 7134 CIS AREA

Dinamica Generale CIS Kazymyra Malevycha St, 66 03680 Kiev - Ukraine Phone: +38 050 418 75 72

